V6JS - 6" DEEP 45 DEGREE STANDARD J BLADE EXTRUDED ALUMINUM EQUIPMENT SCREEN

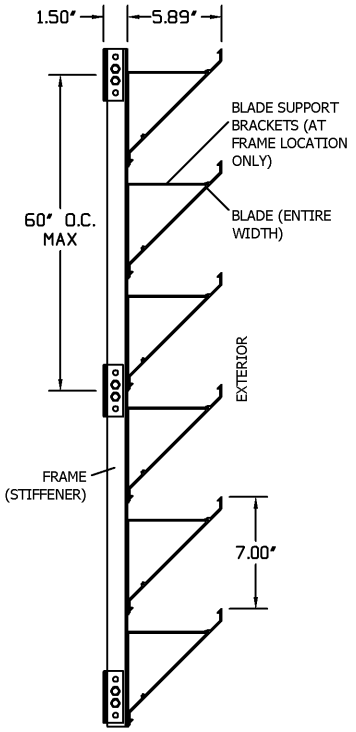

SECTION VIEW

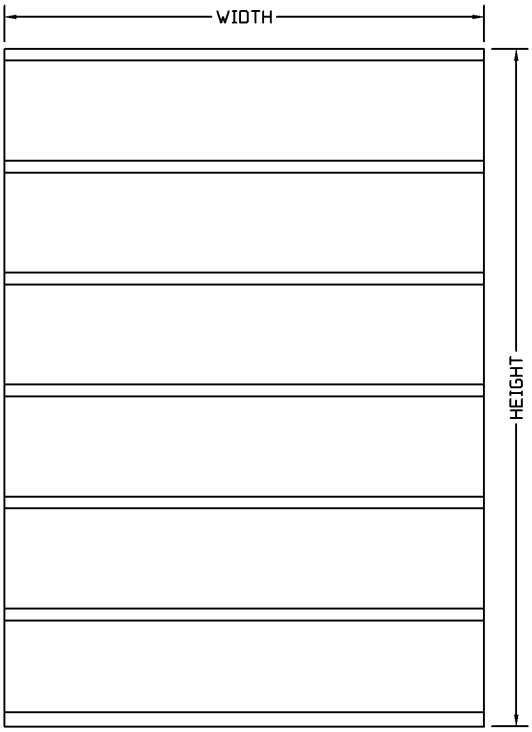

ELEVATION VIEW

BLADE - 0.081" THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM

FRAME - CONCEALED 0.125" THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM

DESIGNED FOR 30 PSF WIND LOAD

MINIMUM SIZE: 12" WIDE X 12" HIGH

MAXIMUM SIZE - UNLIMITED WITH JOINED PANELS

MAXIMUM PANEL SIZE: 60" WIDE X 120" HIGH OR 120" WIDE X 60" HIGH

OPTIONS:

HIGHER WIND LOAD RATINGS

ARCHITECTURAL FINISHES

HINGED SINGLE AND DOUBLE DOORS

NOTE:

STRUCTURAL FRAMING TO SUPPORTING STRUCTURE (ROOF DECK, WALLS, CONCRETE PAD, ETC.) BY OTHERS. STRUCTURAL FRAMING IS REQUIRED FOR ATTACHMENT POINTS EVERY 60" OF WIDTH AND HEIGHT TO MEET 30 PSF WIND LOAD.

END PANEL



HIDDEN

BLADE STIFFENER



HIDDEN

VERTICAL MULLION
(MULTIPLE PANELS WIDE)



HIDDEN

MITERED OUTSIDE CORNER

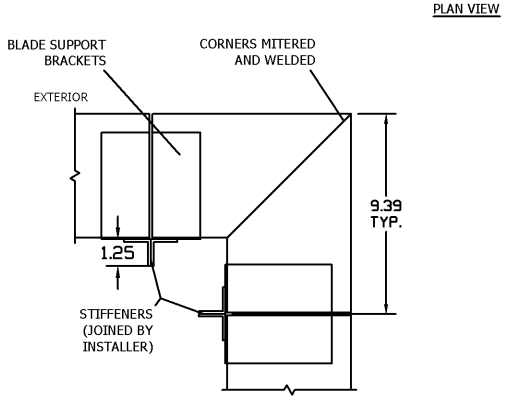

TYPICAL MOUNTING
(VERTICAL MULLION SHOWN)

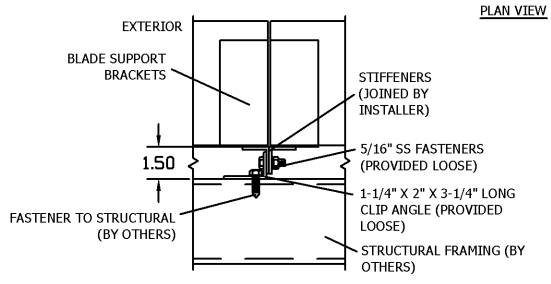

HORIZONTAL MULLION
(MULTIPLE PANELS HIGH)



HIDDEN

ARCHITECTURAL LOUVERS

266 W Mitchell Ave - Cincinnati, OH 45232
PH: (888) 568-8371 Fax: (888) 568-8370

PROJECT			
CONTRACTOR			
ARCHITECT			
DRAWN BY: JRR	DATE: 06/2025	DRAWING TYPE: TECHNICAL SHEET	DRAWING TITLE: V6JS

© COPYRIGHT 2025
Harray, LLC dba Architectural Louvers