

MarShield™

CUSTOM RADIATION SHIELDING PRODUCTS



MARSHIELD NUCLEAR

*When safety & success must be **Absolutely Assured***

www.marshield.com



SOLUTIONS

T-Flex® products are a great solution for all your shielding needs. Tungsten, Bismuth and Iron-based attenuating materials are available. T-Flex® can be molded into any shape, allowing the application of localized shielding directly at the source. Isolated hot spots can be shielded using T-Flex®, eliminating the need to shield larger areas surrounding the hot spot. T-Flex® can be engineered to meet weight, size, and radiation attenuation specifications. T-Flex® products have saved power plants time and money during maintenance shutdowns. All T-Flex® products are non-toxic and free of hazardous materials. T-Flex® shielding materials allow us the ability to create light weight, easy-to-use, customizable products. Customer feedback indicates that T-Flex® is a user friendly and effective means of reducing radiation fields. The weights and sizes available make T-Flex® easy to handle, with improved ergonomics, reducing the prospect of lifting and handling injuries. T-Flex® can provide attenuation properties similar to lead products, but at half the weight.





FLEXIBILITY

T-Flex® products maximize shielding effectiveness while keeping weight to a minimum. T-Flex® is ideal for applications that require custom mouldable shapes along with flexibility; such as small-bore pipes, elbows and valves. T-Flex® products are available as blankets, ribbon wrap, pipe shields, floor tiles, magnetic tiles, and molded shapes - flexible or rigid. Fasteners and securing methods are also available, including magnets, grommets and locking devices. T-Flex® Tungsten, Bismuth, and Iron products are rated for continuous use up to 350° F/176° C.

T-Flex® Highlights:

- Efficient placement of shielding closest to source
- Install in seconds through “slip-over-the component” design, integral fasteners and/or magnets
- Keep radiation fields ALARA, achieving dose reduction goals by adding these highly effective shielding materials to your shielding tool box
- Lead alternative with no hazardous materials
- Mold to any shape
- Easily cut for in field adjustments



RIBBON WRAP

These highly flexible T-Flex® strips can be spiral wrapped around equipment and components for a quick hot spot shielding solution. Standard ribbon length is 8 feet (approximately 2.4 m) and material can be cut in the field easily using typical cutting tools.



BLANKETS

T-Flex® blankets are an alternative to lead blankets, providing similar radiation attenuation characteristics without the potential hazard. Blankets can be easily cut in the field using a utility knife, but are durable, standing up to normal wear and tear. Increased flexibility over standard lead blankets makes T-Flex® blankets easier to handle and allows for shielding to be placed closer to the source.



| Material | Size | lb/ft ² | Attenuation | Weight |
|------------------|---------|--------------------|-------------|--------|
| T-Flex® Tungsten | 1' x 3' | 10 | 19% | 30 lb |
| T-Flex® Tungsten | 1' x 3' | 15 | 27% | 45 lb |
| T-Flex® Tungsten | 1' x 4' | 10 | 19% | 40 lb |
| T-Flex® Tungsten | 1' x 4' | 15 | 27% | 60 lb |
| T-Flex® Bismuth | 1' x 3' | 10 | 20% | 30 lb |
| T-Flex® Bismuth | 1' x 3' | 15 | 29% | 45 lb |
| T-Flex® Bismuth | 1' x 4' | 10 | 20% | 40 lb |
| T-Flex® Bismuth | 1' x 4' | 15 | 29% | 60 lb |

CUSTOM


The silicone base for T-Flex® allows for manufacturing of complex and custom shapes. Custom-moulded shapes allow the shielding to be installed as close to the source as possible, making it more effective at reducing dose rates, helping to keep doses ALARA.



FLOOR SHIELDING

T-Flex® floor shielding is designed to provide economical and ergonomic solutions for shielding sources located below workers. Each tile combines the attenuation properties of T-Flex® with the durability of a work mat. Floor mats can be cut for in field adjustment as required. Floor shielding features a non-slip diamond tread surface. Sample applications include:

- Dry cask platforms
- Scorpion platforms
- Refuelling bridges

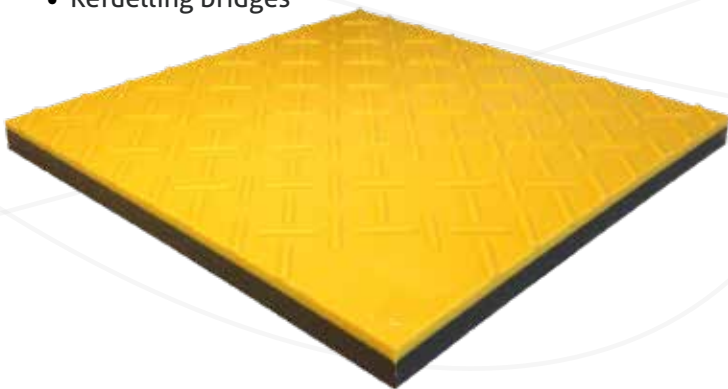

| Material | lb/ft ² | Thickness | Attenuation |
|------------------|--------------------|-----------|-------------|
| T-Flex® Tungsten | 10 | 0.375" | 25% |
| T-Flex® Bismuth | 10 | 0.515" | 24% |
| T-Flex® Iron | 10 | 0.765" | 18% |
| T-Flex® Tungsten | 15 | 0.505" | 32% |
| T-Flex® Bismuth | 15 | 0.725" | 33% |
| T-Flex® Iron | 15 | 1.125" | 26% |
| T-Flex® Tungsten | 20 | 0.645" | 39% |
| T-Flex® Bismuth | 20 | 0.945" | 41% |
| T-Flex® Iron | 20 | 1.475" | 32% |



LEAD LINED CABINETS



APPLICATIONS

DECAY CABINETS

UNIT DOSE CABINETS

PREPARATION ENCLOSURE

BASE CABINETS

RADIOISOTOPE

STORAGE CABINETS

WASTE CABINETS

PET UNIT DOSE CABINETS

PHANTOM CABINETS

MarShield manufactures a wide range of standard or custom designed lead lined laboratory furniture suitable for nuclear medicine or radiochemistry laboratories. Our comprehensive line is tailored and designed to meet your specific requirements.

FEATURES & BENEFITS

- Standard models are available with a choice of three lead thicknesses: $\frac{1}{4}$ ", $\frac{1}{2}$ " or 1"
- Custom models are available with lead thicknesses of $\frac{1}{4}$ " to greater than 6"
- All lead used in the fabrication of our cabinets is at minimum 99.94% pure lead, ASTM B-29
- All sides of each cabinet, cupboard doors and drawer faces are lead-lined with encapsulated lead
- Each cabinet is designed with 4" high adjustable legs, making it easier to install or move the cabinet with a forklift
- All shelves and drawers offer 100 lb capacity with the drawer or shelf fully extended
- Removable, easy glide drawers for ease of cleaning and decontamination
- All standard models include the option of having 304 stainless steel surfaces, with a #4 finish and 4" high backsplash
- Individual, key-locked drawers and doors to prevent unauthorized use
- Heavy duty hinges and locks





"...we work extensively to ensure that our designs are functional with their surroundings."



NUCLEAR LEAD POURS



APPLICATIONS

STORAGE CONTAINERS

CASTINGS

FLASKS

PIPE SLEEVES

"...we specialize in flask, storage container, pipe sleeve and casting lead pours."

With almost four decades of experience, MarShield has the manufacturing facilities, equipment and expertise to continuously pour lead in excess of 100,000 lbs. Our approved, proprietary nuclear pouring and quality control procedures ensure the lowest opportunity for product porosity and the highest density of lead available.

FEATURES & BENEFITS

- Robust quality assurance program
- Approved proprietary nuclear pour procedure
- All facets of each pour including fabrication, heating and cooling are performed in house to provide strict quality control and cost savings
- All lead used is at minimum 99.94% pure, ASTM B-29
- On-site engineering and design assistance is available



ROLLING RADIATION **BARRIERS & BOOTHS**



“...the versatility of rolling barriers provides a safe workspace for the operator.”

MarShield manufactures standard and custom-designed rolling radiation shielding barriers and booths. These full-body shielding units are designed to shield nuclear personnel from radiation.

FEATURES & BENEFITS

- Durable, solid, lead-lined panels, available with 1/32" to greater than 2" of lead equivalency shielding
- Custom widths and heights are available to meet your needs
- Shielded floors and ceilings are available in booths
- Portable shielding barriers with heavy duty, locking casters
- Leaded glass viewing panels are available
- Highly durable



APPLICATIONS

- PORTABLE SHIELDING**
- SLIDING DOOR SHIELDING**
- MULTI DIRECTIONAL SHIELDING**



LEAD WOOL BLANKETS



"...we can supply any configuration to best address your requirements."

MarShield lead blankets are made using lead wool or lead plate if requested. The lead wool is flexible for ease of handling, with lead strands from .005" to .015" in diameter.

APPLICATIONS

STACKABLE DOSE REDUCTION

LARGE AREA HOT SPOTS

TEMPORARY WORK STATIONS

FEATURES & BENEFITS

- Easy and cost-effective radiation shielding solution
- Lead, quilted to an ANSI approved inner cover to ensure no shifting
- Standard and custom sizes available
- #5 brass grommets spaced as required
- Vinyl-laminated sheeting for applications up to 125°F (51.7°C) or silicon laminated up to 500°F (260°C)
- Standard colour choice of yellow, green or white, custom colours available on request
- Meets or exceeds Federal Specification QQ-C-40 Type II Grade C
- On-site engineering and design assistance is available

LEAD LINED STORAGE CONTAINERS



"...we ensure that the final design is functional and meets regulatory requirements."

MarShield manufactures a comprehensive line of custom-designed, lead-lined storage containers to meet your exact requirements. We employ a fully-qualified design team to help with every step of the process.

FEATURES & BENEFITS

- Manufactured from A36 or 44W carbon steel with a stainless-steel option available
- Lead-lined or filled with ASTM B-29 pure lead, 99.94% grade
- Grounded smooth, free from sharp corners and edges
- All lead is fully encapsulated with no potential for exposure
- Lead shielding thickness from 1/32" to greater than 2"
- Heavy duty hinges and locks

APPLICATIONS

RADIOACTIVE MATERIAL
TRANSPORTATION

VIAL PIGS FOR PET AND OTHER
HIGH ENERGY RADIONUCLIDES

UNIT DOSE FOR
RADIOPHARMACEUTICALS



HIGH DENSITY CONCRETE



APPLICATIONS

PLANT CONSTRUCTION

NON-DESTRUCTIVE
TESTING ROOMS

PERMANENT SHIELDING

"...high-density blocks are the best choice for structural shielding."

MarShield supplies high-density concrete that is a cost-effective alternative to lead brick shielding in large builds. The significant attenuation provided by high-density blocks surrounding a large source provides a major reduction in additional shielding requirements within a facility.

FEATURES & BENEFITS

- Many sizes of blocks are available
- No hazardous dust emissions during installation
- Weather resistant
- Density up to 300 lbs/ft³, more than 50% higher than standard-density concrete
- Can be used for gamma and neutron shielding



"...ideal for new construction to reduce wall or ceiling thickness and achieve space savings."

MarShield manufactures straight and interlocking lead brick shielding which provides the best choice for construction where temporary or permanent shields or storage areas are required. A choice of straight or interlocking brick offers flexibility in design and construction choices. Lead bricks are commonly used when sheet lead is impractical or unavailable in required sizes.

FEATURES & BENEFITS

- Cast from 99.9% pure lead
- Standard and custom sizes available
- Interlocking bricks use chevron "V" shape tongue and groove to prevent radiation streaming
- Versatile and reusable for multiple applications
- MarShield provides the widest range of thicknesses available in the industry with standard sizes from 3/4" to 2 1/2" thickness of lead



APPLICATIONS

HOT CELLS


RADIOACTIVE MATERIAL
TRANSPORTATION

TEMPORARY SHIELDING





BORATED POLYETHYLENE

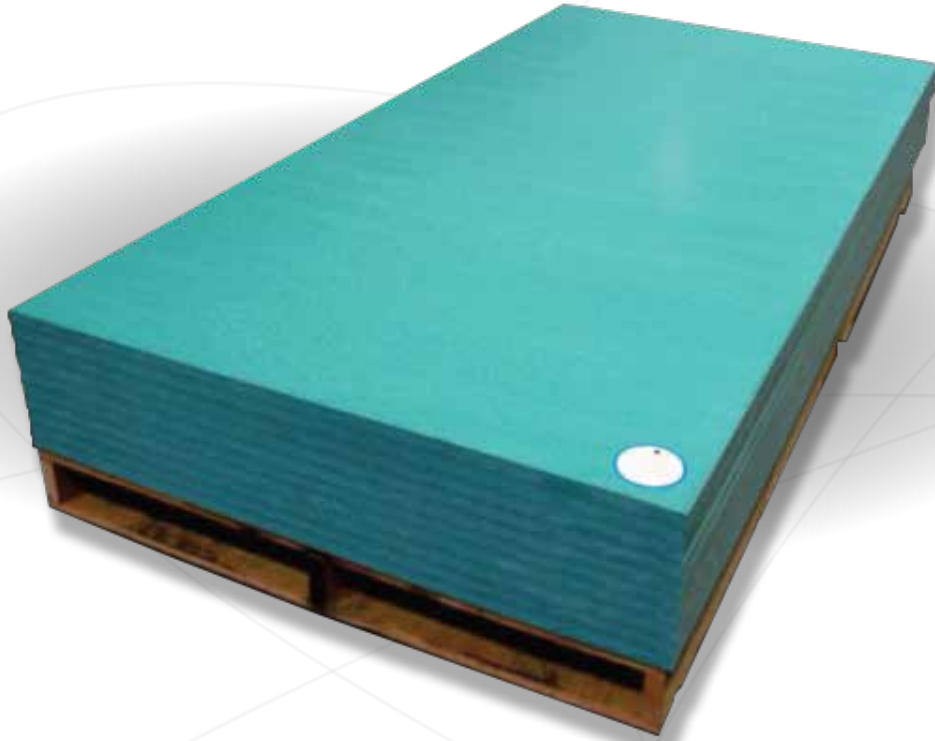

APPLICATIONS

HOT CELLS

STORAGE CONTAINERS

DETECTION SYSTEMS

"...a simple solution to protection from neutron radiation."

High-density borated polyethylene, supplied by MarShield, is a lightweight, cost-effective solution for attenuation and absorption of neutrons.

FEATURES & BENEFITS

- 5% boron content by weight, stocked in 1" X 48" X 96" sheets
- Consistent density and homogeneity
- Durable over a wide temperature range
- Easy installation and fabrication
- Custom cutting and CNC machining services available
- Low density polyethylene also available with no boron content



“...ideal for areas with secondary or low-level radiation.”

MarShield lead-lined curtains are a lightweight, economical solution to provide radiation shielding in areas where a permanent wall is not practical. These are ideal for areas with secondary radiation. Tailored to your unique requirements, our lead curtains are available in a variety of lead shielding equivalencies, colors, sizes and configurations.

FEATURES & BENEFITS

- Available in lead shielding equivalencies of .25, .30, .35, .50, 1.0 and 1.5 mm
- Individual panels (max 48" wide) attach using Velcro to create custom widths
- Easy to clean, decontaminate and maintain
- Optional 12-gauge enclosed steel roller tracks and 12-gauge rollers with steel wheels are available



APPLICATIONS

TEMPORARY SHIELDING

MOVABLE SHIELDING

ISOTOPE SHIELDING

FOUR DECADES OF TRUSTED EXPERIENCE



Mars Metal Company

4140 Morris Drive, Burlington, Ontario Canada L7L 5L6

Ph: 905.637.3862 Fax: 905.637.8841
Toll Free U.S. & Canada 1.800.381.5335

sales@marshield.com www.marshield.com www.marsmetal.com

